



Our Mission

Levetec Surface Preparation Equipment, LLC is a distributor and manufacturer of quality diamond tools and surface preparation equipment in the stone and concrete market. We are determined to provide the best possible diamond tools and surface preparation machines that allow the realization of our customer's optimum goals. We also noted that not all the customer's needs were being met with the available choices. We decided to produce our own machines with the goal in mind of reaching these results. Creating and producing our own machine also enabled us to have control over RPM, speed and feed, relative pressure, amount of resistance of the bonds on the tools, and to design in many more user-friendly aspects.


We are satisfied with the results that have been achieved up to this point. However, we will still continue to develop new technology and ideas in an effort to produce the most efficient machine possible.

Our Commitment

Levetec Surface Preparation Equipment, LLC is committed to providing the very best solutions through our diamond products and services available to our customers in several industries.

Our customers have come to rely on the consistent quality and performance we deliver time after time, providing state-of-the-art technology and equipment. Customer satisfaction is a vital and well-established part of our company. The employees of Levetec are here to assist with any needs, questions, or concerns that our customers may have. The best effort is put forth to solve any problems in the most timely and efficient manner.

Our dedication to customer satisfaction is evident in the pride we take in our people, our products, our customers, and our promise to always remain committed and grateful.

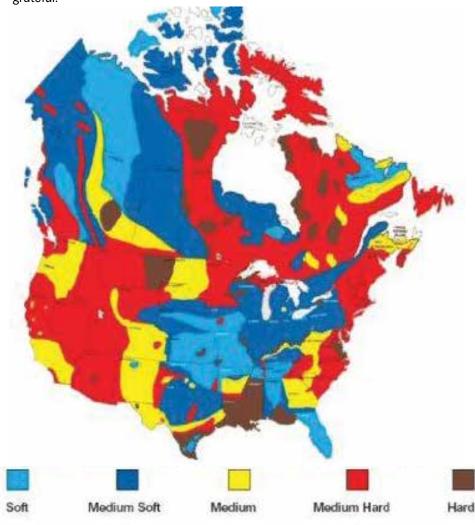

BUSINESS TERMS

- Operating hours are Monday-Friday: 7:00 a.m. to 5:00 p.m. Pacific Standard Time.
- Orders placed by 2:00 p.m. PST can be shipped out the same day to our customers.
- Our normal shipping method is via FedEx or UPS, but we have the ability to ship with most carriers. International shipping is also available.
- Payment prior to delivery. Machine orders will be scheduled to ship after payment is received.
- All shipments are FOB Seattle (Redmond), WA unless otherwise stated.
- Pricing is subject to change due to cost increases. However, we strive to deliver the lowest possible cost to our customer that is a combination of purchase price and product performance.

DAMAGED SHIPMENTS

ATTENTION: We check and inspect all packages before sending. Great effort is made on our side to make all shipments damage proof. Please check all shipments upon delivery carefully before signing acceptance signature of package. If damage is found, have the driver sign an acknowledgement of damage, reject delivery, return to sender, and contact us immediately.

OUR RETURN POLICY

While we do stand behind the integrity of our products, we ask that you contact a Levetec representative prior to sending back any purchases. This will enable us to first find a solution to any problem over the phone. Levetec does not accept returns after 14 days following the Purchase date. All returned items are subject to inspection to insure product has not been used or misused prior to processing a credit. If in the event and at our discretion, we choose to accept a return after 14 days, a 25% restocking fee will result.

For special items made specifically at a customer's request, those items are non-refundable and non-returnable. There are exceptions made in the case of manufacturer's defect.

Please include company name, address, telephone number, and brief description of problem with any returns sent back to us.

Levetec warranty does not include cost of transport.

LEVETEC WARRANTY POLICY

All new machines are guaranteed from defects of materials and workmanship under normal use and that have been serviced regularly, during the specific warranty period of each model type. All tooling have no long term warranties, but will be replaced or repaired if delivered in a defective state. The warranty is limited to replacement of parts only, no labor charges will be paid unless agreed too prior to sale. All machines will be repaired including parts and labor if deemed under warranty and returned to LEVETEC in Redmond, WA. USA

This warranty does not apply if, in the judgement of LEVETEC, the product fails due to damage from shipment, handling, storage, accident, abuse, misuse or tampering, if it has been used or maintained in a manner not conforming to product manual instructions, has been modified in any way, or has had any serial number removed or defaced. Repair by anyone other than Levetec or an approved agent will void the warranty. The maximum liability of LEVETEC under this warranty is limited to replacement of the product covered by the warranty.

LIABILITY

Except as specifically provided in this agreement or as required by law, the warranties and remedies stated above are exclusive and in lieu of all others, oral or written, express or implied. Any and all other warranties, including implied warranties of merchantability, fitness for a particular purpose and noninfringement of third party rights are expressly excluded. Levetec shall not under any circumstances be liable to any person for any special, incidental, indirect or consequential damages, including without limitation, damages resulting from use or malfunction of the products, loss of profits or revenues or costs of replacement goods, even if LEVETEC is informed in advance of the possibility of such damages.

Levetec Surface Preparation Machinery, LLC

20245 N.E. Redmond-Fall City Road Redmond, WA 98053 U.S.A. toll free 866.538.3832 tel. 425.284.0950 fax. 425.284.0960

www.levetec.com

WHY LEASE? OR SHOULD WE SAY, "WHY NOT LEASE?"

- · Less Impact on Cash Flow
- Tax Benefits (consult your CPA for advice)
- 100% Financing, including soft costs (shipping, installation, training)
- Conservation of Credit and Capital
- Reduced Paperwork, one page application and no financial statements are required for purchases under \$75K
- Options for Purchase or Renewal
- Reduced Interest Rate Risk
- Will not show up on your personal credit so it's not "exposed" to other lenders as a debt
- Secured by the equipment on the lease, not a blanket lien on your business or any other equipment that you own
- Quicker approvals and funding than a Bank
- No experience or time in business required Great for startups
- Many different Programs available to suit your business' needs including no payments for 90 days or only \$99 for the first few months so you can start making money off the equipment before you start paying on it! You can even set up lower payments during your slow season every year.
- Up to 60 months terms
- No prepayment penalty
- Ability to purchase equipment when you need it –Never having to turn down a job because you're not set up for it

APPLYING FOR A PURCHASE OR LEASE

Obtaining a lease is much easier than you think;

- 1. Contact Levetec or a company below to obtain a ONE PAGE financing application
- 2. A Financial Analyst will then help you to choose the financing option that best suits your company's needs
- 3. Obtain approval (within 24 to 48 hours)
- 4. Then you're ready to select the equipment to be financed

So don't hesitate, call today to get approved and on your way to increasing your business opportunities!

DIRECT CAPITAL

James Siederman 603-373-1347 jsiederman@directcapital.com

*financing available for US and Canadian citizens

Pacific Sun Equipment Leasing

Brian Grant 250-491-9586 ext. 210

*financing for Canadian citizens

G



Avenger 460 is a great machine for smaller jobs. The size and weight allow for easy loading and unloading at the jobsite and offers ease of moving through smaller spaces. The Avenger 460 is extremely versatile, can be used anywhere from floor preparation to polishing, and you won't be disappointed with the results.

Features:

- Compact and light, and can collapse for transport
- Perfect for Concrete, Stone, Terrazzo and Wood
- Variable speed, counter-rotating heads
- Coarse grinding, surface preparation, epoxy/coatings removal, polishing, maintenance
- Instant Change System™ magnetic metal plates with removable velcro attachments
- All steel gears

SPECIFICATIONS	
Motor 4 hp	
Voltage 220V Single phase	
Weight 350 lbs	
Working Width 19 in	
Speed 300-1200 rpm	
Tank Capacity 6.6 gal (25 liters)	
Abrasive Plates Three 8" plates	

Z

 α



Instant Change Magnetic Plates

Average Production Rates Per Day*

Marble: 800 – 1000 ft²
Terrazzo: 1200 - 1500 ft²
Granite: 300 – 420 ft²
Concrete: 2000 - 3000ft²
Glue Removal: 700 – 1500 ft²
Paint Removal: 1300 – 3200 ft²

*Production rates may vary due to job conditions, tooling, operator, etc.

Recommended Package

Item Number	Description	Quantity
Avenger 460	Avenger 460 Variable Speed Grinder – 220V	1
LA-30M	Diacrete Double Round Metal Diamond Segments 30 Grit	9
LA-60M	Diacrete Double Round Metal Diamond Segments 60 Grit	9
LA-120M	Diacrete Double Round Metal Diamond Segments 120 Gri	t 9
HFP38100	3 in Semi-Metal Polishing Pad, 8 Segment, 100 Grit	9
HFP38200	3 in Semi-Metal Polishing Pad, 8 Segment, 200 Grit	9
A-200	Diacrete Resin Polishing Pads 200 Grit	9
A-400	Diacrete Resin Polishing Pads 400 Grit	9
A-800	Diacrete Resin Polishing Pads 800 Grit	9
A-1500	Diacrete Resin Polishing Pads 1500 Grit	9
A-3000	Diacrete Resin Polishing Pads 3000 Grit	9

*This package can be customized

Additional Accessories

(depending on job needs)

- Ermator S26 Vacuum
- 220V Electrical Package
- Leve-Sil Hardener



For Epoxy/Coatings Removal

• Diacrete Combo Tool



Diacrete ComboSee page 31 for more information.



The Avenger 550 is the perfect mid size machine, with huge capacity. The Avenger 550 is a single phase, variable speed machine providing you with more versatility and control on the job.

Features:

- Preferred machine for coarse grinding, surface preparation, epoxy/coatings removal, and polishing
- Variable speed, counter-rotating heads
- Planetary heads made with all steel gears
- Additional weights are available for extra grinding pressure.
- Instant Change System magnetic metal plates with removable Velcro attachments


SPECIFIC	AIIUNS
Motor	5 hp
Voltage	220 V Single phase/
Weight	450 lbs
Working Width	22 in
Speed	300-1600 rpm
Tank Capacity	6.6 gal (25 liters)
Abrasive Plates	Three 8 5/8" plates

Average Production Rates Per Day*

Marble: 800 – 1075 ft²
Terrazzo: 1500 - 2000 ft²
Granite: 430 – 540 ft²
Concrete: 2500 - 3500 ft²
Glue Removal: 1075 – 2150 ft²
Paint Removal: 1600 – 3770 ft²

*Production rates may vary due to job conditions, tooling, operator, etc.





മ

Instant Change Magnetic Plates

フ

Avenger 550

Recommended Package

Item Number	Description	Quantity
Avenger 550	Avenger 550 Variable Speed Grinder – 220V/460V	1
LA-30M	Diacrete Double Round Metal Diamond Segments 30 Grit	9
LA-60M	Diacrete Double Round Metal Diamond Segments 60 Grit	9
LA-120M	Diacrete Double Round Metal Diamond Segments 120 Grid	t 9
HFP38100	3 in Semi-Metal Polishing Pad, 8 Segment, 100 Grit	9
HFP38200	3 in Semi-Metal Polishing Pad, 8 Segment, 200 Grit	9
A-200	Diacrete Resin Polishing Pads 200 Grit	9
A-400	Diacrete Resin Polishing Pads 400 Grit	9
A-800	Diacrete Resin Polishing Pads 800 Grit	9
A-1500	Diacrete Resin Polishing Pads 1500 Grit	9
A-3000	Diacrete Resin Polishing Pads 3000 Grit	9

*This package can be customized

Additional Accessories

(depending on job needs)

- Ermator S36
- 220V/460V Electrical Package
- Leve-Sil Hardener





• Diacrete Combo Tool



Diacrete Combo See page 31 for more information.



The Avenger 650 is the perfect mid size machine, with huge capacity. The Avenger 650 is a single phase, variable speed machine providing you with more versatility and control on the job.

Features:

- · Preferred machine for coarse grinding, surface preparation, epoxy/coatings removal, and polishing
- Variable speed, counter-rotating heads
- · Planetary heads made with all steel gears
- Additional weights are available for extra grinding pressure.
- Instant Change System magnetic metal plates with removable Velcro attachments

SPECIFIC	ATIONS
Motor	10 hp
Voltage	220 V Single phase/
Weight	550 lbs
Working Width	25 in
Speed	300-1600 rpm
Tank Capacity	6.6 gal (25 liters)
Abrasive Plates	Three 8 5/8" plates

Average Production Rates Per Day*

Marble: 800 – 1075 ft² Terrazzo: 1500 - 2000 ft² Granite: 430 - 540 ft² Concrete: 2500 - 3500 ft2 Glue Removal: 1075-2150 ft² Paint Removal: 1600 – 3770 ft²

*Production rates may vary due to job conditions, tooling, operator, etc.

Instant Change Magnetic Plates

൩

G

Avenger 650

Recommended Package

Item Number	Description	Quantity
Avenger 650	Avenger 650 Variable Speed Grinder – 220V/460V	1
LA-30M	Diacrete Double Round Metal Diamond Segments 30 Grit	9
LA-60M	Diacrete Double Round Metal Diamond Segments 60 Grit	9
LA-120M	Diacrete Double Round Metal Diamond Segments 120 Gri	t 9
HFP38100	3 in Semi-Metal Polishing Pad, 8 Segment, 100 Grit	9
HFP38200	3 in Semi-Metal Polishing Pad, 8 Segment, 200 Grit	9
A-200	Diacrete Resin Polishing Pads 200 Grit	9
A-400	Diacrete Resin Polishing Pads 400 Grit	9
A-800	Diacrete Resin Polishing Pads 800 Grit	9
A-1500	Diacrete Resin Polishing Pads 1500 Grit	9
A-3000	Diacrete Resin Polishing Pads 3000 Grit	9

*This package can be customized

Additional Accessories

(depending on job needs)

- Ermator S36
- 220V/460V Electrical Package
- Leve-Sil Hardener






• Diacrete Combo Tool



Diacrete ComboSee page 31 for more information.





Diacrete Resin
Polishing Discs
See page 32 for more information.

S

П

フ



The Avenger 750 is a very powerful, and highly productive machine yet easy to handle and operate. The Avenger is the ideal professional machine for larger

Features:

- Preferred machine for coarse grinding, surface preparation, epoxy/coatings removal, and polishing
- Grinding Head can be raised / lowered electronically
- Variable speed, counter-rotating heads
- Planetary heads made with all steel gears
- Additional weights are available for extra grinding
- Instant Change System magnetic metal plates with removable Velcro attachments

15 hp
460 V three phase
675 lbs
30 in
300-2000 rpm

SPECIFICATIONS

Average Production Rates Per Day*

5.3 gal (20 liters)

Three 9 7/8 in plates

Marble: 1100 – 1625 ft² Terrazzo: 1625 – 2050 ft² Granite: 690 - 820 ft² Concrete: 5500 - 7500 ft² Glue Removal: 2030 – 4750 ft² Paint Removal: 2700 - 6800 ft²

*Production rates may vary due to job conditions, tooling, operator, etc.

ORDER TODAY!! 866.538.3832

Tank Capacity

Abrasive Plates

Recommended Package

Item Number	Description	Quantity
Avenger 750	Avenger 750 Variable Speed Grinder – 460V	1
LA-30M	Diacrete Double Round Metal Diamond Segments 30 Grit	9
LA-60M	Diacrete Double Round Metal Diamond Segments 60 Grit	9
LA-120M	Diacrete Double Round Metal Diamond Segments 120 Gri	t 9
HFP38100	3 in Semi-Metal Polishing Pad, 8 Segment, 100 Grit	9
HFP38200	3 in Semi-Metal Polishing Pad, 8 Segment, 200 Grit	9
A-200	Diacrete Resin Polishing Pads 200 Grit	9
A-400	Diacrete Resin Polishing Pads 400 Grit	9
A-800	Diacrete Resin Polishing Pads 800 Grit	9
A-1500	Diacrete Resin Polishing Pads 1500 Grit	9
A-3000	Diacrete Resin Polishing Pads 3000 Grit	9

*This package can be customized

Additional Accessories

(depending on job needs)

- Ermator T8600
- S36 vacuum
- C3000 Pre-separator
- 460V Electrical Package
- Leve-Sil Hardener





Diacrete Double Round Metal Bond Diamond Segments See page 25 for more information.



Diacrete Resin
Polishing Discs
See page 32 for more
information.

For Epoxy/Coatings Removal

- Diacrete Combo Tool
- PCD Scraper






Diacrete ComboSee page 31 for more information.

ORDER TODAY!! 866.538.3832

刀

ш

S.

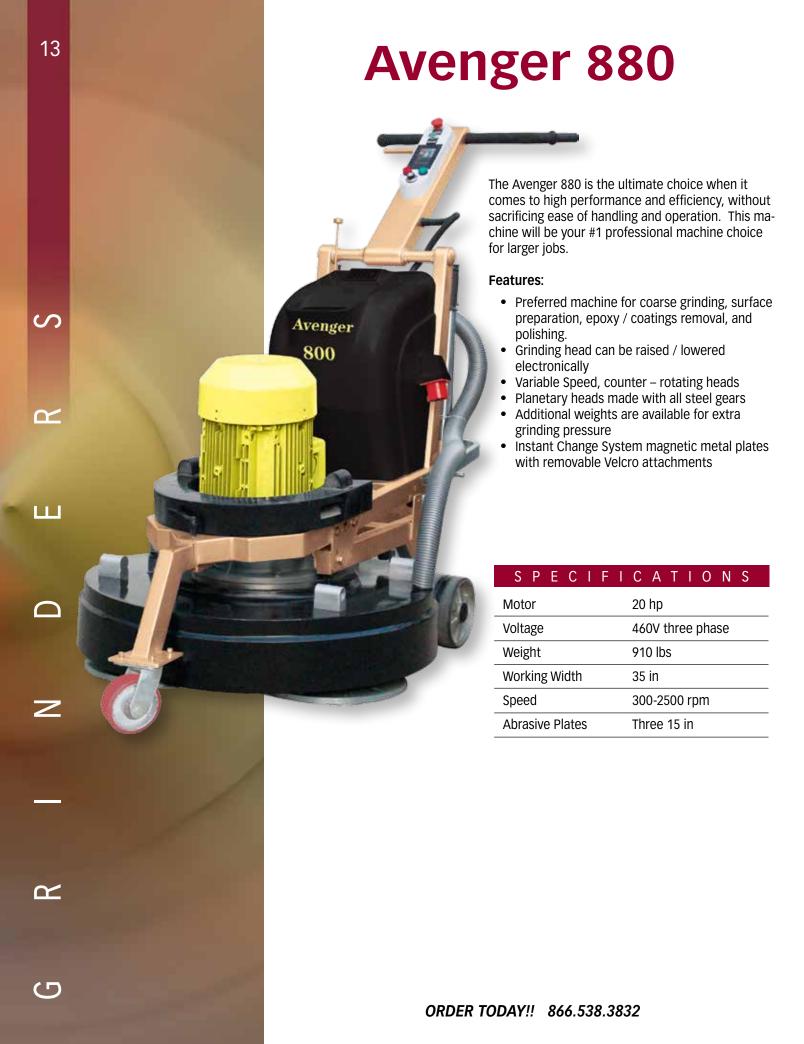

Recommended Package

Item Number	Description	Quantity	
Avenger 880	Avenger 880 Variable Speed Grinder – 460V	1	
LA-30M	Diacrete Double Round Metal Diamond Segments 30 Grit	15	
LA-60M	Diacrete Double Round Metal Diamond Segments 60 Grit	15	-
LA-120M	Diacrete Double Round Metal Diamond Segments 120 Gri	t 15	
HFP38100	3 in Semi-Metal Polishing Pad, 8 Segment, 100 Grit	15	
HFP38200	3 in Semi-Metal Polishing Pad, 8 Segment, 200 Grit	15	
A-200	Diacrete Resin Polishing Pads 200 Grit	15	
A-400	Diacrete Resin Polishing Pads 400 Grit	15	
A-800	Diacrete Resin Polishing Pads 800 Grit	15	
A-1500	Diacrete Resin Polishing Pads 1500 Grit	15	
A-3000	Diacrete Resin Polishing Pads 3000 Grit	15	

*This package can be customized

Additional Accessories

(depending on job needs)

- Ermator T8600
- S36 vacuum
- C3000 Pre-separator
- 460V Electrical Package
- Leve-Sil Hardener





Diacrete Double Round
Metal Bond Diamond
Segments
See page 25 for more




Diacrete Resin
Polishing Discs
See page 32 for more information.

For Epoxy/Coatings Removal

- Diacrete Combo Tool
- PCD Scraper






ORDER TODAY!! 866.538.3832





S





- Innovative system of quick change tools: with actuators the head lifts 90° allowing the operator to change the tools without having to lift the grinding machine.
- Adjustable work pressure from 500Kg to 750 Kg: with an central actuator it is possible to supply more or less pressure to the tools.
- Completely gear driven for superior durability and reliability: there are no belts that are subject to breaking.
- Radio Remote control: multidirectional joystick to avoid vibrations to the operator.
- Maximized silence in order to work in any environment.
- Removable front wheel for easy transportation.
- Planetari inclination to allow a bigger amount of frontal removal pressure.
- Greaser included for fast and effective maintenance.
- Maximum Performance from large head pressure.





SPECIFI	CATIONS
Motor	25 hp
Voltage	440V/50 Hz 440V/60 Hz
Weight	2900 lbs
Phase	Three-phase
Working Width	39 in (1000mm)
Speed	300-1000 rpm
Tank Capacity	12 gal (46 liters)
Abrasive Plates	9.5 in (240mm)

2

വ

Expander 1000

Recommended Package

Item Number	Description	Quantity	
Expander 1000	Expander 10000 Variable Speed Grinder	1	
LA-30M	Diacrete Double Round Metal Diamond Segments 30 Grit	18	
LA-60M	Diacrete Double Round Metal Diamond Segments 60 Grit	18	-
LA-120M	Diacrete Double Round Metal Diamond Segments 120 Gri	t 18	
HFP38100	3 in Semi-Metal Polishing Pad, 8 Segment, 100 Grit	18	
HFP38200	3 in Semi-Metal Polishing Pad, 8 Segment, 200 Grit	18	
A-400	Diacrete Resin Polishing Pads 400 Grit	18	
A-800	Diacrete Resin Polishing Pads 800 Grit	18	
A-1500	Diacrete Resin Polishing Pads 1500 Grit	18	
A-3000	Diacrete Resin Polishing Pads 3000 Grit	18	

*This package can be customized

Additional Accessories

(depending on job needs)


- Ermator T8600
- S36 vacuum
- C3000 Pre-separator
- 460V Electrical Package
- Leve-Sil Hardener



For Epoxy/Coatings Removal

- Diacrete Combo Tool
- PCD Scraper







Diacrete Double Round Metal Bond Diamond Segments See page 25 for more information.



Diacrete Resin
Polishing Discs
See page 32 for more information.

S

フ



വ

Expander 950RX

Recommended Package

Item Number	Description	Quanti
Expander 950RX	Expander 90RX Variable Speed Grinder	1
LA-30M	Diacrete Double Round Metal Diamond Segments 30 Grit	. 9
LA-60M	Diacrete Double Round Metal Diamond Segments 60 Grit	. 9
LA-120M	Diacrete Double Round Metal Diamond Segments 120 Gri	t 9
HFP38100	3 in Semi-Metal Polishing Pad, 8 Segment, 100 Grit	9
HFP38200	3 in Semi-Metal Polishing Pad, 8 Segment, 200 Grit	9
A-400	Diacrete Resin Polishing Pads 400 Grit	9
A-800	Diacrete Resin Polishing Pads 800 Grit	9
A-1500	Diacrete Resin Polishing Pads 1500 Grit	9
A-3000	Diacrete Resin Polishing Pads 3000 Grit	9

^{*}This package can be customized

Additional Accessories

(depending on job needs)

- Ermator T8600
- S36 vacuum
- C3000 Pre-separator
- 460V Electrical Package
- Leve-Sil Hardener




For Epoxy/Coatings Removal

- Diacrete Combo Tool
- PCD Scraper



Diacrete Combo PCD Scraper
See page 31 for more information.





Diacrete Resin
Polishing Discs
See page 32 for more
information.

S

П

フ



Expander 850RX

Recommended Package

Item Number	Description	Quantity	
Expander 850RX	Expander 850RX Variable Speed Grinder	1	
LA-30M	Diacrete Double Round Metal Diamond Segments 30 Grit	9	
LA-60M	Diacrete Double Round Metal Diamond Segments 60 Grit	9	-
LA-120M	Diacrete Double Round Metal Diamond Segments 120 Gri	t 9	
HFP38100	3 in Semi-Metal Polishing Pad, 8 Segment, 100 Grit	9	
HFP38200	3 in Semi-Metal Polishing Pad, 8 Segment, 200 Grit	9	
A-400	Diacrete Resin Polishing Pads 400 Grit	9	
A-800	Diacrete Resin Polishing Pads 800 Grit	9	
A-1500	Diacrete Resin Polishing Pads 1500 Grit	9	
A-3000	Diacrete Resin Polishing Pads 3000 Grit	9	

^{*}This package can be customized

Additional Accessories

(depending on job needs)

- Ermator T8600
- S36 vacuum
- C3000 Pre-separator
- 460V Electrical Package
- Leve-Sil Hardener



For Epoxy/Coatings Removal

- Diacrete Combo Tool
- PCD Scraper



Diacrete ComboSee page 31 for more information.

ORDER TODAY!! 866.538.3832



Diacrete Double Round Metal Bond Diamond Segments See page 25 for more information.



Diacrete Resin
Polishing Discs
See page 32 for more
information.

D

П

刀

()



Features:

- · Total Gear drive system.
- Pivots from a center point right over the center of gravity.
- Grinding head can be raised and lower electrically - mill off the high points and then lower head as needed.
- · No job is too big a challenge to the **EXPANDER!** A powerful 15 HP motor powers this machine, yet it's so well balanced that it can be literally controlled with two fingers!
- Bush-hammering (scarification), grinding, honing and polishing are achieved with a productivity rate two to three times higher than competitive machines.
- Narrow passages? Tight Corners? No problem, the EXPANDER lays claim to a one-of-a-kind feature by which it is possible to adjust the down pressure on the grinding pads!

Made in Italy the home of polished floors for over 2000 years. Large commercial floors have found their match in the EXPANDER another Levetec statement of cutting-edge technology! Its PATENTED PLANETARY **SYSTEM** is not driven by belts but by Hardened Gears this sets the **EXPANDER** in a league of its own, with no competition. Thanks to this exclusive technology, it's the only machine of its kind with an adjustable grind height feature. The list of features is almost endless.

S P E C	IFICATIONS
Motor	15 hp
Amperage	24 A

Motor	19 11p
Amperage	24 A
Voltage	480V/60 Hz
Weight	750 lbs
Working Width	31 in (650-787mm)
Speed	300-1300 rpm
Tank Capacity	12+gal (46 liters)
Abrasive Plates	9.5 in (240mm)

No Belts! All Gear Operation.

П

ス

Expander 750

Recommended Package

Item Number	Description	Quantity
Expander 750	Expander 750RX Variable Speed Grinder	1
LA-30M	Diacrete Double Round Metal Diamond Segments 30 Grit	. 9
LA-60M	Diacrete Double Round Metal Diamond Segments 60 Grit	. 9
LA-120M	Diacrete Double Round Metal Diamond Segments 120 Gri	t 9
HFP38100	3 in Semi-Metal Polishing Pad, 8 Segment, 100 Grit	9
HFP38200	3 in Semi-Metal Polishing Pad, 8 Segment, 200 Grit	9
A-400	Diacrete Resin Polishing Pads 400 Grit	9
A-800	Diacrete Resin Polishing Pads 800 Grit	9
A-1500	Diacrete Resin Polishing Pads 1500 Grit	9
A-3000	Diacrete Resin Polishing Pads 3000 Grit	9

*This package can be customized

Additional Accessories

(depending on job needs)

- Ermator T8600
- S36 vacuum
- C3000 Pre-separator
- 460V Electrical Package
- Leve-Sil Hardener



For Epoxy/Coatings Removal

- Diacrete Combo Tool
- PCD Scraper





Diacrete ComboSee page 31 for more information.

ORDER TODAY!! 866.538.3832



SPECIFI	CATIONS
Motor	2.5 hp
Voltage	110 V
Weight	106 lbs (48kg)
Working Width	17 in (430mm)
Speed	155 rpm
Tank Capacity	5 gal (18 liters)

The Kroma is designed for heavy duty applications. With an innovative 2.5 hp motor it's the most powerful single phase cleaning machine in the world. Thanks to its great range of available accessories this machine is capable of handling many types of jobs from grinding to polishing to buffing.







Lippage Tools

4in Turbo Style Vacuum Brazed Pads Velcro Backed – 16, 30, 50, 100, 200 Grits



Polishing Tools

4in Diacrete Polishing Pads - Velcro Backed - 50, 100, 200, 400, 800, 1800, 3000 Grits

ORDER TODAY!! 866.538.3832

G

て

1

Z

П

フ

(/

Ш

Avenger Propane



SPECIFI	CATIONS
Motor	13 or 17 hp
Voltage	110 V
Weight	275 lbs
Working Width	
Brush Speed	325 rpm
Brush Size	3 – 10"
Performance	21,500 sq ft per hour

The Avenger Propane machines are aggressive machines that easily remove floor coating in one pass. Planetary driven heads eliminate torque and transport wheels reduce labor.

- 3 rush planetary design
- Simple design reduces maintenanceTransport wheel standard reduces fatigue
- Standard catalytic muffler lowers emissions

27"
minim

	SPECIFICATIONS
	Motor 17 hp
	Voltage 110 V
	Weight 300 lbs
٠	Working Width
	Brush Speed 325 rpm
•	Brush Size 3 – 10"
•	Performance 24,500 sq ft per hour

 α

Diamond Plate Layout Options



3 Segments

Designed for hard concrete applications, allowing more down pressure.



Standard 6 Segments

Ideal for leveling floor.



Standard 6 Segments


Great for uneven floors, designed to follow floor surface.




12 Segment plate

Designed for very soft floors, increases surface area and leveling.

ORDER TODAY!! 866.538.3832

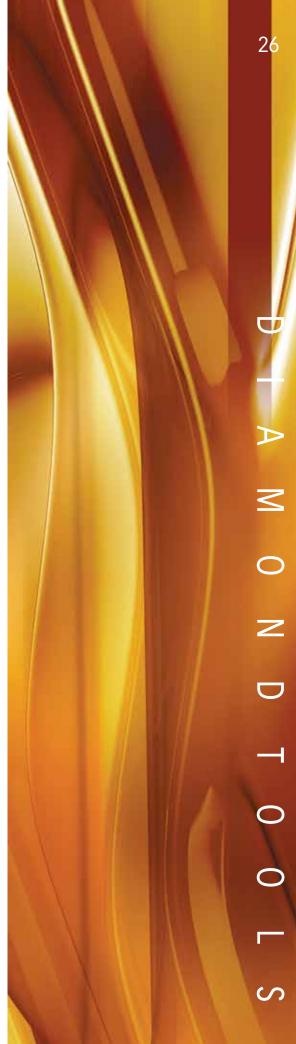

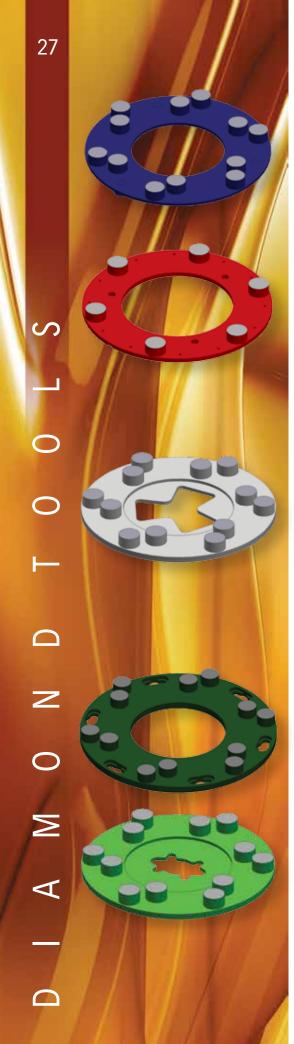

Diamond Plate

KLINDEX PLATES

KL-PL-30M-6 Diamond Plates, 6 or 12 Round Segments - 30 Grit for Medium Concrete
KL-PL-60M-6 Diamond Plates, 6 or 12 Round Segments - 60 Grit for Medium Concrete
KL-PL-120M-6 Diamond Plates, 6 or 12 Round Segments - 120 Grit for Medium Concrete

SCANMASKIN PLATES

SCPL6030M SCPL6060M SCPL60120M 30 Grit, Medium Bond Magnetic Plate, 3 diamond segments (150mm) 60 Grit, Medium Bond Magnetic Plate, 3 diamond segments (150mm) 120 Grit, Medium Bond Magnetic Plate, 3 diamond segments (150mm)

SCPL8030M SCPL8060M SCPL80120M 30 Grit, Medium Bond Magnetic Plate, 6 or 12 diamond segments (210mm) 60 Grit, Medium Bond Magnetic Plate, 6 or 12 diamond segments (210mm) 120 Grit, Medium Bond Magnetic Plate, 6 or 12 diamond segments (210mm)

SCPL9530M SCPL9560M SCPL95120M 30 Grit, Medium Bond Magnetic Plate, 6 or 12 diamond segments (240mm) 60 Grit, Medium Bond Magnetic Plate, 6 or 12 diamond segments (240mm) 120 Grit, Medium Bond Magnetic Plate, 6 or 12 diamond segments (240mm)

HTC PLATES

HTCPL0730M HTCPL0760M HTCPL07120M 30 Grit, Medium Bond Magnetic Plate, 6 or 12 diamond segments (180mm) 60 Grit, Medium Bond Magnetic Plate, 6 or 12 diamond segments (180mm) 120 Grit, Medium Bond Magnetic Plate, 6 or 12 diamond segments (180mm)

HTCPL0930M HTCPL0960M HTCPL09120M 30 Grit, Medium Bond Magnetic Plate, 6 or 12 diamond segments (230mm) 60 Grit, Medium Bond Magnetic Plate, 6 or 12 diamond segments (230mm) 120 Grit, Medium Bond Magnetic Plate, 6 or 12 diamond segments (230mm)

HTCPL1030M HTCPL1060M HTCPL10120M 30 Grit, Medium Bond Magnetic Plate, 6 or 12 diamond segments (270mm) 60 Grit, Medium Bond Magnetic Plate, 6 or 12 diamond segments (270mm) 20 Grit, Medium Bond Magnetic Plate, 6 or 12 diamond segments (270mm)

HUSQVARNA PLATES

HSQPL0930M HSQPL0960M HSQPL09120M (270mm) 30 Grit, Medium Bond Magnetic Plate, 6 or 12 diamond segments (270mm) 60 Grit, Medium Bond Magnetic Plate, 6 or 12 diamond segments (270mm) 120 Grit, Medium Bond Magnetic Plate, 6 or 12 diamond segments

LAVINA PLATES

LAVPL0930M LAVPL0960M LAVPL09120M 30 Grit, Medium Bond Magnetic Plate, 6 or 12 diamond segments (9in) 60 Grit, Medium Bond Magnetic Plate, 6 or 12 diamond segments (9in) 120 Grit, Medium Bond Magnetic Plate, 6 or 12 diamond segments (9in)

Diacrete Metal Series

Diacrete Series

The diamonds in our Diacrete Series have proven themselves to out last the standard size diamonds commonly used in the industry. Most popular tool for grinding and leveling floor, and can be used either wet or dry. Available in varied bonds, depending on hardness of concrete you are working on for maximum performance.

Diacrete Double Round Metal Bond Diamond Segments

(25mm wide x 12mm high) Leave less unwanted scratches

LA-30S 30 Grit Soft Bond LA-30M 30 Grit Medium Bond LA-30H 30 Grit Hard Bond LA-60S 60 Grit Soft Bond LA-60M 60 Grit Medium Bond LA-60H 60 Grit Hard Bond LA-120M 120 Grit Medium Bond LA-120H 120 Grit Hard Bond LA-200M 200 Grit Medium Bond



LA-16M 16 Grit Medium Bond **LA-16H** 16 Grit Hard Bond

Budget Line Tools

Extra Hard Concrete

1820ES - 18/20 Grit, Extra Soft Bond **3040ES** - 30/40 Grit, Extra Soft Bond **6080ES** - 60/80 Grit, Extra Soft Bond **120150ES** - 120/150 Grit, Extra Soft Bond Average Concrete

2025M - 20/25 Grit, Medium Bond **3040M** - 30/40 Grit, Medium Bond **6080M** - 60/80 Grit, Medium Bond **120150M** - 120/150 Grit, Medium Bond Extra Soft Concrete

1820EH - 18/20 Grit, Extra Hard Bond **3040EH** - 30/40 Grit, Extra Hard Bond **6080EH** - 60/80 Grit, Extra Hard Bond **120150EH** - 120/150 Grit, Extra Hard Bond Hard Concrete

1820S - 18/20 Grit, Soft Bond **3040S** - 30/40 Grit, Soft Bond **6080S** - 60/80 Grit, Soft Bond **120150S** - 120/150 Grit, Soft Bond Soft Concrete

1820H - 18/20 Grit, Hard Bond **3040H** - 30/40 Grit, Hard Bond **6080H** - 60/80 Grit, Hard Bond **120150H** - 120/150 Grit, Hard Bond

Diamond Tools

Diacrete Metal Flares


Designed with a high segment pattern, excellent for grinding on soft concrete.

Circular Metal Bond Diamond Pads

C-30 3in – 30 Grit C-50 3in – 50 Grit C-70 3in – 70 Grit C-100 3in – 100 Grit C-200 3in – 200 Grit C-400 3in – 400 Grit 4C-30 4in – 30 Grit
4C-50 4in – 50 Grit
4C-70 4in – 70 Grit
4C-100 4in – 100 Grit
4C-200 4in – 200 Grit
4C-400 4in – 400 Grit

ORDER TODAY!! 866.538.3832



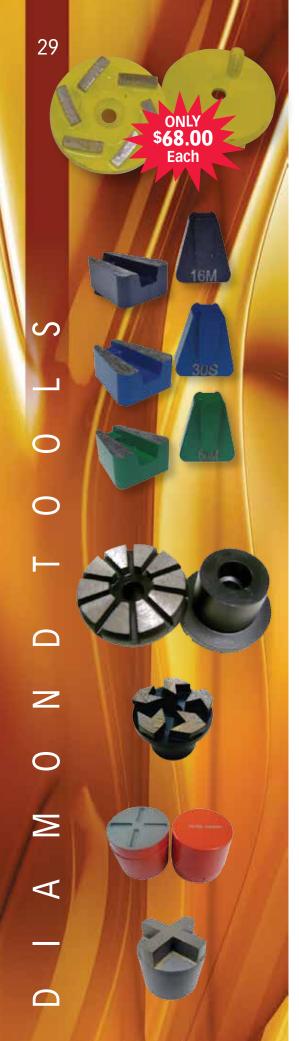

Diamond Tools

STI Tools

30S

STS30 30 Grit, 6 Segments

Snap In tools for Scanmaskin Machines

Soft Bond for Hard Concrete - 30 Grit

30M	Medium Bond for Medium Concrete – 30 Grit
30H	Hard Bond for Soft Concrete – 30 Grit
60S	Soft Bond for Hard Concrete – 60 Grit
60M	Medium Bond for Medium Concrete – 60 Grit
60H	Hard Bond for Soft Concrete – 60 Grit
120S	Soft Bond for Hard Concrete – 120 Grit
120M	Medium Bond for Medium Concrete – 120 Grit
120H	Hard Bond for Soft Concrete – 120 Grit

3" Plug

18/20#, 30/40#, 50/60#, 60/80#, 120/150# Medium Bond, Soft Bond, Hard Bond

3" Arrow Segment Plug

30/40#, Medium Bond

2" Plug

30/40#, 60/80#, 102/150#, Medium

2" X-Segemnts plug

20/25#, Medium

Coating Removal Tools

Diacrete Scraper Tools

Designed for quick removal of any coatings, such as epoxy and glue from concrete floors.

The Diacrete Scraper tool works by riding on the tail disk which limits travel of the tool into the concrete surface. This allows the head to scrap away coatings or glue, but not damage the concrete. The tail itself will in time develop a sharp edge that will also help remove coatings.

PCDH-Clockwise PCD Scraper

PCDH-Counterclockwise PCD Scraper

Diacrete Combo Tool

DCT Scraper Clockwise Diacrete Combo Tool - 2 segmented PCD

Scraper with a diamond segment trailer -

Left Trapezoid

DCT Scraper Counter Clockwise Diacrete Combo Tool - 2 segmented PCD

Scraper with a diamond segment trailer -

Right Trapezoid

STI Scraper Tools

STI scrapers are very useful for removing coatings and glue from concrete floors.

The PCD scrapers generate less heat than grinding and therefore do not remelt the coating and smear it around the floor.

Rather than grinding through the coating or clue which would take some time and mess, the PCD scrapers just scrape the coating off. Leaving the concrete almost clean and ready to be cleaned up by a quick pass with a diamond tool.

592043 Snap on Piranha


To remove thin coatings from concrete surface such as paint, flaking glue, remnants of carpet – removes debris with minimal damage to floor. Porous, soft floors can tear with this tool.

Diacrete Vacuum Brazed Pads

This tool handles heavy lippage jobs on marble. The fully exposed diamond makes this a hard working, aggressive tool.

TC3016 3in Turbo Style Vacuum Brazed Pad – Velcro Backed – 16 Grit
 TC3030 3in Turbo Style Vacuum Brazed Pad – Velcro Backed – 30 Grit
 TC3050 3in Turbo Style Vacuum Brazed Pad – Velcro Backed – 50 Grit
 TC3100 3in Turbo Style Vacuum Brazed Pad – Velcro Backed – 100 Grit
 TC3200 3in Turbo Style Vacuum Brazed Pad – Velcro Backed – 200 Grit



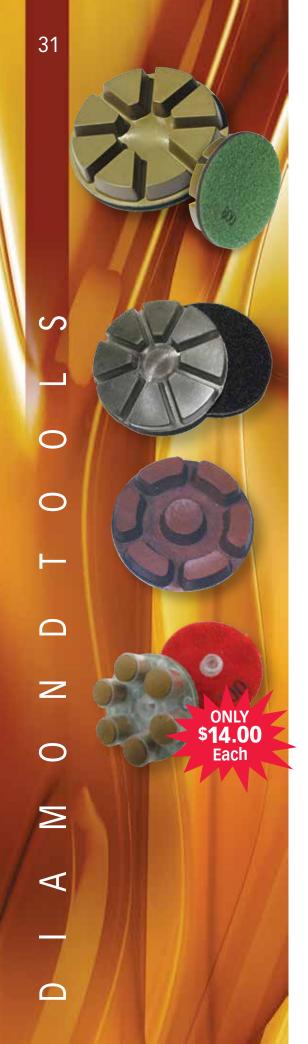

Resin Diamond Tools

Diacrete Resin Polishing Discs

Velcro Backed, Wet/Dry 3in, 50 Grit A-50 4A-50 4in, 50 Grit 3in, 100 Grit 4in, 100 Grit A-100 4A-100 A-200 3in, 200 Grit 4A-200 4in, 200 Grit A-400 3in, 400 Grit 4A-400 4in, 400 Grit 3in, 800 Grit 4in, 800 Grit A-800 4A-800 A-1800 3in, 1800 Grit 4A-1800 4in, 1800 Grit 3in, 3000 Grit 4A-3000 4in, 3000 Grit A-3000

Diacrete Resin Discs are the most popular resin available, this high performance disc can be used either wet or dry and can handle aggressive polishing all the way to finish.

Hybrid Resin Polishing Tools

HFP38050 3in Semi-Metal Polishing Pad – 8 segments – 50 Grit
 HFP38100 3in Semi-Metal Polishing Pad – 8 segments – 100 Grit
 HFP38200 3in Semi-Metal Polishing Pad – 8 segments – 200 Grit
 HFP38400 3in Semi-Metal Polishing Pad – 8 segments – 400 Grit

A unique resin diamond tool that incorporates metal grit into the resin matrix. These are an excellent transition diamond tool, designed to be used after grinding with metal bond diamonds before switching to polishing pads.

Venetos Resin Floor Polishing Discs

 POS 0
 3in - 100 Grit
 POS 3
 3in - 800 Grit

 POS 1
 3in - 200 Grit
 POS 4
 3in - 1800 Grit

 POS 2
 3in - 400 Grit
 POS 5
 3in - 3000 Grit

For soft dusting concrete and terrazzo applications, dry use only.

Phenolic Dot Resin Floor Grinding Pads

Dot - 6 - 50Resin Floor Grinding Pads, 50 Grit - 6 Dots - 60mm - Dry FloorDot - 6 - 100Resin Floor Grinding Pads, 100 Grit - 6 Dots - 60mm - Dry FloorDot - 6 - 200Resin Floor Grinding Pads, 200 Grit - 6 Dots - 60mm - Dry FloorDot - 6 - 400Resin Floor Grinding Pads, 400 Grit - 6 Dots - 60mm - Dry FloorDot - 6 - 800Resin Floor Grinding Pads, 800 Grit - 6 Dots - 60mm - Dry FloorDot - 6 - 1500Resin Floor Grinding Pads, 3000 Grit - 6 Dots - 60mm - Dry FloorDot - 6 - 3000Resin Floor Grinding Pads, 3000 Grit - 6 Dots - 60mm - Dry Floor

NEW Phenolic Dots are fast cutting, leaves no resin marking.

What are they?

New Floor Diamond Discs that Wash like a sponge, polish like a diamond!


Levetec introduces the innovative "SuperShine & SpongeLux" system for floor restoration and maintenance of marble, terrazzo and polished concrete. SuperShine & SpongeLux discs restore the shine to dull and worn floors.

SuperShine is a new abrasive disc covered with a special diamond resin. Available in 3 different grits, they are able to clean and restore the original shine.

FOR WET USE ONLY

SpongeLux is a special sponge disc, that is able to wash and polish with only one step, thanks to its special composition, impregnated with polishing compound. SpongeLux is the ideal solution for standard maintenance of all types of surfaces since it provides great results and keeps floors shining. *FOR WET USE ONLY*





How to use them?

"SuperShine & SpongeLux" are easy to use! They are available in the same standard sizes of Floor Discs normally sold all over the world. They can be applied on any type of monobrush and autoscrubber on the market without modification. *For wet use only.*

Using "SuperShine & SpongeLux" regularly, instead of the traditional Floor Discs, allows you to restore and maintain a shiny surface continually without changing your normal maintenance routine.

The combination of SuperShine1, SuperShine2 and SuperShine3 will allow you to replace dulled foot traffic wear patterns with a beautiful shiny floor.

SpongeLux, thanks to its advanced formula, with one step, cleans and polishes marble, granite, porcelain tile and concrete giving it a mirror effect...quickly! Regularly used, your floor will remain clean and shiny without hard work.

	Treatment With	Result
Restoring Worn Floors	SuperShine1 (400 grit) SuperShine2 (800 grit) SuperShine3 (1500 grit) SpongeLux	Honed Semipolished Polished Shiny
Ordinary Maintenance	SpongeLux	Shiny
Extraordinary Maintenance	SuperShine3 (1500 grit) SpongeLux	Polished Shiny



ORDER TODAY!! 866.538.3832

With the new "SuperShine & SpongeLux" discs, the floor becomes shiny, smooth without scratching as if it was just polished.

With the traditional system, using normal floor discs, the floor looses its shine, remains scratched and becomes opaque.

SuperShine & SpongeLux

ADVANTAGES

The floor remains incredibly shiny and bright, as if it was just polished without using special polishing machines or products

It removes dullness
It removes even the most tenacious dirt and spots

Fast and Easy to use!

No damage risk

Easy maintenance, one product cleans, polishes and protects

Economic: With SuperShine & SpongeLux you reduce cost because you do not need to use a lot of products

Ecologic

NO WAX! mechanical shine

The regular use of SpongeLux protects and waterproofs, in this way the floor becomes more resistant to dirt and spots

Traditional Maintenance

DISADVANTAGES

With the passing of time, the shine disappears and it is necessary to restore the floor with a smoothing system

It does not remove dullness
It does not remove the most tenacious dirt

Takes more time...

Possible damage risk using non suitable products


Difficult maintenance...


You increase the cost for various chemical products

There is more need of chemical products

Sometimes wax is needed in order to produce the shine and this makes the maintenance more expensive and frequent

The continuous use of classic detergent tends to deteriorate the floor and increase the porosity, causing dirt to adhere to the floor







"SuperShine & SpongeLux" are available in different sizes and can be used with any type of monobrush and autoscrubber.

SHINY With High Speed Gloss 100 Buffer Gloss 85 RUNN 80 Gloss 80 Gloss 85 RUNN 80 RUNN

SHINY FLOOR 100 With Autoscrubber 100 Gloss 100 Gloss 70 Gloss 30 Gloss 30 Gloss 15 SuperShine2 SuperShine3 SpongeLux

SuperShine & SpongeLux 8"

30181	SuperShine1
30182	SuperShine2
30183	SuperShine3
30185	SpongeLux

SuperShine & SpongeLux 13"

SuperShine1
SuperShine2
SuperShine3
SpongeLux

SuperShine & SpongeLux 17"

30178	SuperShine1
30179	SuperShine2
30180	SuperShine3
30190	SpongeLux

SuperShine & SpongeLux 20"

30251	SuperShine1
30252	SuperShine2
30253	SuperShine3
30191	SpongeLux

SuperShine & SpongeLux 21"

30251	SuperShine1
30252	SuperShine2
30253	SuperShine3
30192	SpongeLux

Norton Maintenance Pad

Norton Maintenance Pads are a diamond maintenance pad that can be used on polished concrete, marble, terrazzo, ceramic tiles, vinyl and epoxy floors. The diamond pads clean and polish the floor mechanically instead of using chemicals. Use the Norton Maintenance Pads to transform your dull, worn floors into a clean, glossy, and brightly polished surface. Not recommended for granite.

Dry mop the floor, removing obvious debris and dirt. Select the appropriate grit of diamond maintenance pad. Scratches are removed or greatly reduced and floor is left clean and smooth.

Gloss levels achieved are dependent upon the weight of the machine used. The heavier the machine and faster the pad speed, the better results you will achieve. In most cases you will want to use the coarse pad wet and the medium to fine pads dry.

The Norton Maintenance Pads come in various sizes and fit a variety of machines.

Sizes

7", 13", 17", 20" and 27"

COARSE (400 Grit)

Perfect for cleaning and resurfacing concrete or natural stone floors. It works well for floors that are very dirty with light scratches.

MEDIUM (800 Grit)

The second step to resurfacing a natural stone or concrete floor. It can also be the starting pad if the floor is slightly dirty with faint scratches.

FINE (1800 Grit)

The third step to resurfacing a natural stone or concrete floor. It can also be used as a maintenance pad for most surfaces to keep floor shiny.

VERY FINE (3000 Grit)

The final step to resurfacing a natural stone or concrete floor. It is also recommended for on-going maintenance of the floor.





Avenger Black

Avenger Black Burnishers have earned a reputation for being productive, reliable, and safe. Avenger Black Burnishers are widely used by cleaning personnel and professional contractors in the educational, institutional and grocery, and retail industries to maintain high-gloss flooring.

SPECIFICATIONS

27" Avenger Black Burnisher

Performance	34,000 sq ft per hour
Engine	17HP Kawasaki 18HP Kawasaki
Pad Size	27"
Pad Speed	1750 RPM
Size	29" W x 53" L
Weight	230 lbs.
Ignition System	12 Volt Battery Start 110 Volt Start

Avenger Blue

Avenger BLUE Burnishers four stage dust containment system utilizes a vacuum motor and patented dust control system and skirting. Captures up to 80% of dust particles. Reduces the frequency of dust mopping.

SPECIFICATIONS

27" Avenger Blue Burnisher

Performance	34,000 sq ft per hour
Sound Level	<87 DBA
Pad Size	27"
Pad Speed	2000 RPM
Size	29" W x 53" L x 40" H
Weight	240 lbs.
Shipping Weight	280 lbs

Norton Maintenance Pads

Sizes: 7", 13", 17", 20" and 27"

Grits

Coarse (400 Grit) Midium (800 Grit) Fine (1800 Grit) Very Fine (300 Grit)





ш



Wrong! It's only gain with no pain, with the Extrema edging machine! Handsdown, it is the best designed and engineered edging machine on the market today! Extrema's 360° steering handle allows the operator to precision-grind and hone edges right up to the wall while standing up, and at a speed much faster than anything else! A 220V variable speed single phase powerful motor motivates two counter-rotating grinding/honing elements. The incorporated vacuum system allows for virtually dust-free operation. It can also work wet, with the additional optional water-tank.

	5	5	Р	Е	С	1	F	1	С	Α	T	1	0	N		S
	Motor											2 l	1p			
	Voltage											22	0V/	60 H	Ηz	<u>7</u>
Ø	Weight											10	6 lb	S		
	Working	V	/idt	h								11	.5 iı	n (2	92	2mm)
	Speed											30	0-1	200	rŗ	om
	Tank Cap	วล	city	/								2 8	gal ((8 lit	te	rs)
	Abrasive) [Dim	ens	ion	S						5.7	75"	(146	śn	nm)

Extrema Accessories

METAL TOOLS

146700EXTExtrema Metal Bond Grinding Disc - 20 Grit (CS00)146720EXTExtrema Metal Bond Grinding Disc - 40 Grit (CS0)146721EXTExtrema Metal Bond Grinding Disc - 70 Grit (CS1)146722EXTExtrema Metal Bond Grinding Disc - 140 Grit (CS2)

RESIN TOOLS

146793EXT	Extrema Resin Bond Polishing Disc - 60 Grit (CK3 - Green)
146794EXT	Extrema Resin Bond Polishing Disc - 120 Grit (CK4 - Black)
146795EXT	Extrema Resin Bond Polishing Disc - 200 Grit (CK5 - Red)
146796EXT	Extrema Resin Bond Polishing Disc - 400 Grit (CK6 - Yellow)
146797EXT	Extrema Resin Bond Polishing Disc - 800 Grit (CK7 - White)

FLEXIBLE METAL TOOLS

MPP6-C30S	6in Metal Pad - 30 Grit, Soft Bond
MPP6-C30M	6in Metal Pad - 30 Grit, Medium Bond
MPP6-C60S	6in Metal Pad - 60 Grit, Soft Bond
MPP6-C60M	6in Metal Pad - 60 Grit, Medium Bond
MPP6-C150S	6in Metal Pad - 150 Grit, Soft Bond
MPP6-C150M	6in Metal Pad - 150 Grit, Medium Bond
MPP6-C300S	6in Metal Pad - 300 Grit, Soft Bond
MPP6-C300M	6in Metal Pad - 300 Grit, Medium Bond

Avenger Countertop

Countertop Polisher

The Avenger Legend is a rugged, hand operated 13 inch PLANETARY grinder/polisher machine. It has three 5 ½ inch velcro plates and can operate wet or dry.

SPECIFICA	TIONS
Power	110V
Current	10 amp draw
Working Width	13 in.
Variable Speed	500 to 1500 rpm
Weight	40 lbs.



Variable Speed Hand Grinder

Specifically designed for concrete grinding and polishing. Variable Speed from 0 to 1750rpm (will not spin off Velcro pads). Comes with 7in Dust Muzzle and flex hose for ease of use and to connect to vacuum system. See hand grinder accessories page for more options.



Oscillating Tool Package


Variable Speed Oscillator, 120V, 10,000 to 20,000 OPM.

Package includes:

- 3in Triangle Velcro Backing Pad
- Triangle Carbide Pad for Course Grinding of Concrete and Soft Stone
- ElectroPlated Triangle Pads 60, 120, 200 and 400 Grit
- Resin Triangle Pads 800, 1800, 3500 Grit



38

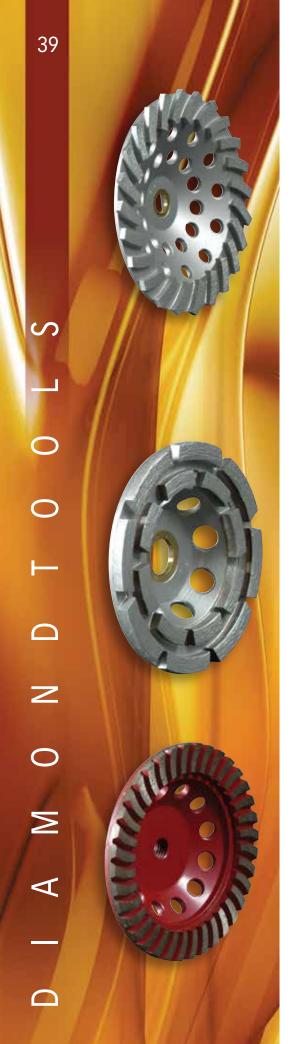

Cup Wheels

Segmented Turbo Cup Wheels

Most efficient way to grind all types of surfaces; concrete, masonry, brick block, stone. Ideal for aggressive grinding and epoxy removal as well. Provides faster removal of materials.

4in Segmented Turbo Cup Wheel – 10 Segments, 5/8-7/8 Hole

CWFT45-18	4.5in Segmented Turbo Cup Wheel – 18 Segments, 5/8-7/8 Hole
CWFT5-18	5in Segmented Turbo Cup Wheel – 18 Segments, 5/8-7/8 Hole
CWFT7-12	7in Segmented Turbo Cup Wheel – 12 Segments, 5/8-7/8 Hole
CWFT7-24	7in Segmented Turbo Cup Wheel – 24 Segments, 5/8-7/8 Hole
CWFT4-10T	4in Segmented Turbo Cup Wheel – 10 Segments, 5/8-11 Thread
CWFT45-18T	4.5in Segmented Turbo Cup Wheel – 18 Segments, 5/8-11 Thread

CWFT45-18T 4.5in Segmented Turbo Cup Wheel – 18 Segments, 5/8-11 Thread 5in Segmented Turbo Cup Wheel – 18 Segments, 5/8-11 Thread 7in Segmented Turbo Cup Wheel – 12 Segments, 5/8-11 Thread 7in Segmented Turbo Cup Wheel – 24 Segments, 5/8-11 Thread 7in Segmented Turbo Cup Wheel – 24 Segments, 5/8-11 Thread

Rowed Cup Wheels

CWFT4-10

Ideal for beveling, smoothing and shaping.

CWSR4	4in Single Row Cup Wheel, 5/8-7/8 Hole
CWSR45	4.5in Single Row Cup Wheel, 5/8-7/8 Hole
CWSR5	5in Single Row Cup Wheel, 5/8-7/8 Hole
CWSR7	7in Single Row Cup Wheel, 5/8-7/8 Hole
CWSR4T	4in Single Row Cup Wheel, 5/8-11 Thread
CWSR45T	4.5in Single Row Cup Wheel, 5/8-11 Thread
CWSR5T	5in Single Row Cup Wheel, 5/8-11 Thread
CWSR7T	7in Single Row Cup Wheel, 5/8-11 Thread
CWDR4	4in Double Row Cup Wheel, 5/8-7/8 Hole
CWDR45	4.5in Double Row Cup Wheel, 5/8-7/8 Hole
CWDR5	5in Double Row Cup Wheel, 5/8-7/8 Hole
CWDR7	7in Double Row Cup Wheel, 5/8-7/8 Hole
CWDR4T	4in Double Row Cup Wheel, 5/8-11 Thread
CWDR45T	4.5in Double Row Cup Wheel, 5/8-11 Thread
CWDR5T	5in Double Row Cup Wheel, 5/8-11 Thread
CWDR7T	7in Double Row Cup Wheel, 5/8-11 Thread

Continuous Rim Cup Wheel

CWTG4C	4in Continuous Rim Cup Wheel – Course Grit – 5/8-11 Thread
CWTG6C	6in Continuous Rim Cup Wheel – Course Grit – 5/8-11 Thread
CWTG7C	7in Continuous Rim Cup Wheel – Course Grit – 5/8-11 Thread

Arrow Segment Cup Wheel

Designed for Coatings Removal

ASC7CUP 7in Arrow Segment Cup Wheel, 5/8 – 7/8,

10mm High Segment, 10 Segments

ASC7CUPT 7in Arrow Segment Cup Wheel, 5/8 – 11 Thread,

10mm High Segment, 10 Segments

ASC7CUPTT 7in Arrow Segment Cup Wheel, 5/8 - Thread,

10mm High Segment, 10 Segments, Tall Cup

T-Segment Cups, Brazed, Wet/Dry

TCW04H 4in T- Segment Cup Wheel, 5/8-7/8
TCW45H 4.5in T- Segment Cup Wheel, 5/8-7/8
TCW05H 5in T- Segment Cup Wheel, 5/8-7/8
TCW07H 7in T- Segment Cup Wheel, 5/8-7/8

TCW04T 4in T- Segment Cup Wheel, 5/8-11 Thread
TCW45T 4.5in T- Segment Cup Wheel, 5/8-11 Thread
TCW05T 5in T- Segment Cup Wheel, 5/8-11 Thread
TCW07T 7in T- Segment Cup Wheel, 5/8-11 Thread

PCD Cup Wheel

PCDCW0405 4in PCD Cup Wheel, 5 Segments, 7/8" PCDCW04505 4.5in PCD Cup Wheel, 5 Segments, 7/8" PCDCW0506 5in PCD Cup Wheel, 6 Segments, 7/8" PCDCW0709 7in PCD Cup Wheel, 9 Segments, 7/8"


Hardwood Floor Preparation

Sandpaper Discs, Velcro Backed

6-7/8", 36 Grit 165-67836 165-80036 8", 36 Grit 6-7/8", 40 Grit 165-67840 165-80040 8", 40 Grit 6-7/8", 50 Grit 165-67850 165-80050 8", 50 Grit 6-7/8", 60 Grit 165-80060 8", 60 Grit 165-67860 6-7/8", 100 Grit 165-67894 165-80100 8", 100 Grit 6-7/8", 120 Grit 8", 120 Grit 165-67896 165-80120

165-900369", 36 Grit165-900409", 40 Grit165-900509", 50 Grit165-900609", 60 Grit165-901009", 80 Grit165-901209", 100 Grit165-901209", 120 Grit



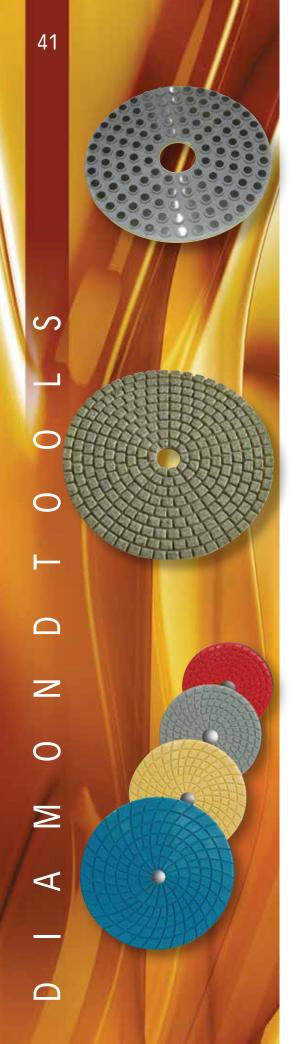

Handgrinder Tools & Flexible Pads

MPP6-C30S 6in Metal Pad - 30 Grit, Soft Bond
MPP6-C30M 6in Metal Pad - 30 Grit, Medium Bond
MPP6-C60S 6in Metal Pad - 60 Grit, Soft Bond
MPP6-C150S 6in Metal Pad - 60 Grit, Medium Bond
MPP6-C150M 6in Metal Pad - 150 Grit, Medium Bond
MPP6-C300S 6in Metal Pad - 300 Grit, Soft Bond
MPP6-C300M 6in Metal Pad - 300 Grit, Medium Bond
MPP6-C300M 6in Metal Pad - 300 Grit, Medium Bond

Other sizes available upon request.

PPG53000

5in Wet Pad – 3000 Grit

PPG55000 5in Wet Pad – 5000 Grit

Concrete Dry Epoxy Resin Polishing Discs

	• • •	_	
PPM450	4in Dry Pad - 50 Grit	PPM51500	5in Dry Discs - 1500 Grit
PPM4100	4in Dry Pad - 100 Grit	PPM53000	5in Dry Discs - 3000 Grit
PPM4200	4in Dry Pad - 200 Grit	PPM5BUFF	5in Dry Discs - Buff
PPM4400 PPM4800 PPM41500 PPM43000 PPM4BUFF	4in Drý Pad - 400 Grit 4in Dry Pad - 800 Grit 4in Dry Pad - 1500 Grit 4in Dry Pad - 3000 Grit 4in Dry Pad – BUFF	PPM750 PPM7100 PPM7200 PPM7400 PPM7800	7in Dry Pad - 50 Grit 7in Dry Pad - 100 Grit 7in Dry Pad - 200 Grit 7in Dry Pad - 400 Grit 7in Dry Pad - 800 Grit
PPM550 PPM5100 PPM5200 PPM5400 PPM5800	5in Dry Discs - 50 Grit 5in Dry Discs - 100 Grit 5in Dry Discs - 200 Grit 5in Dry Discs - 400 Grit 5in Dry Discs - 800 Grit	PPM71500 PPM73000 PPM7BB PPM7WB	7in Dry Pad - 1500 Grit 7in Dry Pad - 3000 Grit 7in Dry Pad - Black Buff 7in Dry Pad - White Buff

Granite/Marble Phenolic Resin Wet Polishing Discs

			•
PPG430 PPG450 PPG4100	4in Wet Pad – 30 Grit Metal 4in Wet Pad – 50 Grit Metal 4in Wet Pad – 100 Grit Metal	PPG5BB PPG5WB	5in Wet Pad – Black Buff 5in Wet Pad – White Buff
PPG4200 PPG4400 PPG4800	4in Wet Pad – 100 Grit Metal 4in Wet Pad – 200 Grit Metal 4in Wet Pad – 400 Grit 4in Wet Pad – 800 Grit	PPG730 PPG750 PPG7100	7in Wet Pad – 30 Grit Metal 7in Wet Pad – 50 Grit Metal 7in Wet Pad – 100 Grit Meta
PPG41500 PPG43000	4in Wet Pad – 1500 Grit 4in Wet Pad – 3000 Grit	PPG7200 PPG7400	7in Wet Pad – 200 Grit Meta 7in Wet Pad – 400 Grit
PPG45000 PPG4BB PPG4WB	4in Wet Pad – 5000 Grit 4in Wet Pad – Black Buff 4in Wet Pad – White Buff	PPG7800 PPG71500 PPG73000	7in Wet Pad – 800 Grit 7in Wet Pad – 1500 Grit 7in Wet Pad – 3000 Grit
PPG530 PPG550	5in Wet Pad – 30 Grit Metal 5in Wet Pad – 50 Grit Metal	PPG75000 PPG7BB PPG7WB	7in Wet Pad – 5000 Grit 7in Wet Pad – Black Buff 7in Wet Pad – White Buff
PPG5100 PPG5200 PPG5400	5in Wet Pad – 100 Grit Metal 5in Wet Pad – 200 Grit Metal 5in Wet Pad – 400 Grit		
PPG5800 PPG51500	5in Wet Pad – 800 Grit 5in Wet Pad – 1500 Grit		

Premium Carrera Pads

Heavy Duty 8mm thick pad designed specifically for concrete

Ideal for hand-held flat polishers, the larger diameters work great on larger walk behind machines

MAT40030	4in Premium Carrera Pad – 30 Grit
MAT40050	4in Premium Carrera Pad – 50 Grit
MAT40100	4in Premium Carrera Pad – 100 Grit
MAT40200	4in Premium Carrera Pad – 200 Grit
MAT40400	4in Premium Carrera Pad – 400 Grit
MAT40800	4in Premium Carrera Pad – 1500 Grit
MAT41500	4in Premium Carrera Pad – 2000 Grit
MAT43000	4in Premium Carrera Pad – 3000 Grit
MAT50030	5in Premium Carrera Pad – 30 Grit
MAT50050	5in Premium Carrera Pad – 50 Grit
MAT50100	5in Premium Carrera Pad – 100 Grit
MAT50200	5in Premium Carrera Pad – 200 Grit
MAT50400	5in Premium Carrera Pad – 400 Grit
MAT50800	5in Premium Carrera Pad – 800 Grit
MAT51500	5in Premium Carrera Pad – 1500 Grit
MAT53000	5in Premium Carrera Pad – 3000 Grit
MAT70030	7in Premium Carrera Pad – 30 Grit
MAT70050	7in Premium Carrera Pad – 50 Grit
MAT70100	7in Premium Carrera Pad – 100 Grit
MAT70200	7in Premium Carrera Pad – 200 Grit
MAT70400	7in Premium Carrera Pad – 400 Grit
MAT70800	7in Premium Carrera Pad – 800 Grit
MAT71500	7in Premium Carrera Pad – 1500 Grit
MAT73000	7in Premium Carrera Pad – 3000 Grit

Premium Carrera Polishing Ring

Ideal for edge work

MATR730	7in Premium Carrera Polishing Ring - 30 Grit
MATR750	7in Premium Carrera Polishing Ring - 50 Grit
MATR7100	7in Premium Carrera Polishing Ring - 100 Grit
MATR7200	7in Premium Carrera Polishing Ring - 200 Grit
MATR7400	7in Premium Carrera Polishing Ring - 400 Grit
MATR7800	7in Premium Carrera Polishing Ring - 800 Grit
MATR71500	7in Premium Carrera Polishing Ring - 1500 Grit
MATR73000	7in Premium Carrera Polishing Ring - 3000 Grit



Dustless Wet/Dry Vacuum

- 100% recommended by Handyman Club of America
- Patented filter system provides three layers of filtration
- Designed to capture extra fine dust
- Excellent for drywall, concrete, stone & fiberglass
- Switch from dry to wet vacuuming without changing filters
- Clean filters without opening canister
- Uses WunderBag™ for "almost HEPA" performance
- Quiet operation, only 81 decibels
- Powerful 23,000 RPM 11.5 amp electric motor

SPEC	IFICATIONS	
CFM	126.39	
Volt	120	
Amps	10.6	
Decibels	79	
Gallon capacity	16	

Shrouds & Accessories

Dustie® Dust Shroud

The Dustie captures 99% of airborne particles at the point of origin, never letting them contaminate your environment. The Dustie fits easily on most hand grinders.

DiscBuddie™ Dust Shroud

The DiscBuddie is a point-of-origin dust control shroud that meets EPA RRP requirements ONLY if it is used with a certified HEPA vacuum that is specifically designed for hazardous materials. It can be used to capture non-hazardous dust with any high-quality shop vacuum.

CutBuddie™ Dust Shroud

The CutBuddie is simply the best dust collection system you can find for hand grinders. Durable, unobtrusive, easy to install and reliable. It is an ideal tool for renovation contractors who have to use point-of-origin dust collection tools to comply with EPA regulations covering lead paint removal.

ORDER TODAY!! 866.538.3832

Shrouds & Accessories

DustBubble™ Dust Free Drilling

DustBubbles are disposable dust collectors for DIY or industrial drills. They use a combination of adhesion to the wall and the action of the drill itself to catch virtually all the dust when you drill. They make drilling jobs easier - leaving both hands free while you drill and saves you the clean up afterwards.

ChipBuddie™ Dustless Paint Scraper

The ChipBuddie dustless paint scraper is an excellent tool for the professional painter, handy man or homeowner. Priced economically, the ChipBuddie dustless paint scraper captures dirt and debris at the point of origin.



The DustBuddie Dust Shroud captures up to 99% of the dust created by a hand grinder – before it escapes into the air. With its brush skirt, adjustable height, and removable front lip, the DustBuddie performs smoothly and accurately.

Dustie-RO™ Dust Shroud

The economical choice for dust collection when using sanders. Great for dust control in the automotive/boat repair industry and industrial applications.

BitBuddie™ Dust Shroud

The BitBuddie dust and slurry control system is for use with drills, hammer drills and core drills. Fast and easy to use, the BitBuddie dust and slurry control system is held in place by vacuum pressure. No clamps or braces are required.

SawBuddie™ Dust Shroud

Because the SawBuddie is a point-of-origin dust control system, it enables contractors to comply with EPA RRP regulations, when attached to a full unit certified HEPA vacuum

Dustless Shroud Accessories

- 5" Cover Plate
- 7" Cover Plate
- Replacement Blades (set of 3, for ChipBuddie Scraper)
- 5" Cover Plate fits modified 5" Dustie or 5" DustBuddie
- 7" Cover Plate fits modified 7" Dustie or 7" DustBuddie
- Arbor Extender
- 18" Hose Adapter







L-Series Scarifier

WRS250G

The Levetec Lev-10 Scarifier provides exceptional performance and industrial strength to meet even the most demanding industrial applications where

aggressive take up and consistant removal are required. This highly well built and versatile unit is supplied with a Electric motor. A powerful 220 or 480 Volt 7.5 hp electric motor, making for a powerful removal machine. Combine that with smooth operation and a practical weight of 240 pounds. A compact size in comparison to other market brands. The Lev-10 Scarifier is

designed to be used with any Levetec vacuum.

WRS250E

The Levetec Lev-10 Scarifier provides exceptional performance and industrial strength to meet even the most demanding industrial applications where aggressive take up and consistant removal are required. This highly well built and versatile unit is supplied with a Honda Gas power plant, a high quality 9 Hp Gas motor making for a powerful removal machine. Combine that with smooth operation and a practical weight of 240 pounds. A compact size in comparison to other market brands. The Lev-10 Scarifier is designed to be used with any Levetec vacuum.

- Zero Depth Height Adjustment
- Side access Drum assembly for quick and easy cutter replacement.
- Cutter Drum located centrally below motor for better balance and less vibration
- Vacuum hookup for practically dust free operation
- Compact design.
- No exposed moving parts
- Heavy duty Hex shaft, sealed bearings and toothed wide belt on drive system

S P E	CIFICATIONS	
	L10	
Power	Electric or Gas	
Motor	7.5 or 9 hp Honda	
Volt	220 V or Gas	
Working Width	10 in (254mm)	
Weight	240 lbs (109 Kg)	

Scarifier Cutters



Tungsten Carbide Standard Cutters12, 8 & 5 Point Standard Cutters
For roughening concrete and asphalt, grooving

For roughening concrete and asphalt, grooving and removal of projections, removal of paint from concrete, elimination of projections.



Star Cutters



Milling Cutter



Beam Cutter



STC Milling Cutter

Suitable for fine flooring work, removal of paint from concrete and asphalt, light cleaning and smoothing of concrete floors, removal of paint and rust from steel surfaces.



Asphaltum Milling Cutter

Suitable for removal of thermoplastic and cold plastic marls on asphalt, milling floor coverings on a thermoplastic basis.



Solid Tungsten Carbide Cutters

Suitable for removal of thermoplastic and cold plastic marls on asphalt, milling floor coverings on a thermoplastic basis.



フ

46



Accessories

SCRATCH KIT

Test the floor before you quote! Don't get surprised by a hard floor that could add weeks to a polishing job. Based on the Mohs scale the scratch test kit comes with four double ended scribes. Using a preset weight on a chosen scribe and inserted on the sled the scribe is dragged across the floor surface. If the scribe scratches the floor you know that the floor is softer then that scribe value.

Hand Grinder Accessories

RIGID BACKER PAD

BP3R 3 Inch Rigid Backer PadBP4R 4 Inch Rigid Backer PadRB-125 5 Inch Rigid Backer Pad

VELCRO BACKER PAD

7VP 7in Velcro Backer Pad with Foam for Hand Grinder

83LH 3 inch Aluminum Lippage Holder

5 inch Dust Muzzle

5 inch Universal Adapter

7 inch Dust Muzzle

7 inch Universal Adapter

18 inch Hose

Q7DC Dust Muzzle

ORDER TODAY!! 866.538.3832

S26 Hepa Dust Extractor

The Pullman-Ermator S26 HEPA Dust Extractor is equipped with tested and certified HEPA filters that trap the smallest, most dangerous-to-breath dust particles and prevents them from being released in the air. A HEPA Dust Extractor not only exhausts perfectly clean air, it is far more efficient for the fast recovery of bulk dry dust, debris and other building materials found on every Construction, Abatement and Restoration jobsite. They can also be connected to electrical power tools to extract the freshly cut and friable concrete dust, considered to be the most hazardous to construction workers.

SPECIFIC	A T I O N S
Volts	120 / 230
HEPA Filter	18 sq. ft.
Cartridge Prefilter	18 sq. ft.
CFM	258
Waterlift	100
HP	3.4
Amps	19.6 / 9.8
Shipping Weight (lb)	103

S36 Hepa Dust Extractor

The model S36 is equipped with Jet Pulse filter cleaning, idrop-downî dust collection in a plastic bag and tested and certified HEPA filtration. What makes the S36 truly unique and unmatched in the concrete grinding and polishing industry is the quantity and size of its filters. It has a massive pre-filter with over 50-square feet of media, constructed in a cone-shape to reduce filter loading. The unique shape of the S36 pre-filter also improves filter cleaning, when necessary, via the Jet Pulse filter cleaning system. Our competitors have difficulty including a single HEPA filter with their vacuums. The S36 is equipped with three (3) independently tested and certified HEPA filters to guarantee that vacuum exhaust is absolutely dust-free!





T8600

The T8600 Three-Phase Dust Extractors has 20% more filter capacity than it's predecessor, model T75. Don't be mislead by it's size, The T8600 Three-Phase Dust Collector is easy to transport to and from jobsites. Suitable for a wide selection of grinders. Equipped with Jet Pulse for effective filter cleaning and Longopac dust free changing of bag and easy disposal of the machine's contents

SPECIFIC	ATIONS
CFM	353
Tube filter (ft2)	25
HEPA filter (ft2)	54
Waterlift	110
HP	11.9
Amps	14
Weight (lb)	439
Volts	480
Dimensions (in)	49 x 27 x 69

T12600

T12600 is the perfect suction unit for a smaller, central vac system. It is the big brother of the T8600, but is also equipped with autostart, a larger cyclone and a HEPA filter whose surface has been increased from 5 to 10 m2. The filter surface is also 65 % larger, and is now 3.8 m2sup. This secures long continuous running without decreased suction power.

SPECIFIC	ATIONS
CFM	647
Tube filter (ft2) 41	
HEPA filter (ft2) 108	
Waterlift	110
HP	17.4
Amps	21
Weight (lb)	716
Volts	480
Dimensions (in)	54 x 31 x 72
	

S

When your dust extractor is prematurely clogging due to large quantities of material, consider the C5500 or C3000 pre-separators. It captures 90% of the material before it reaches the dust extractor, keeping your dust extractor filters clean and extending your grinding operation longer without interruption. Equipped with Longopac for dust free containment and disposal.



Weight Dimensions

Capacity

130 lb

21" x 28" x 57"

liters

Weight

49 lb

Dimensions

25" x 22" x 58"

Capacity

35 liters



Electrical Accessories

Electrical Cords

Electrical cords for the machines. Available in 50 and 100 foot lengths.

- 50' SO CORD with male and female connectors (220V, 1 or 3 phase)
- 100' SO CORD with male and female connectors (220V, 1 or 3 phase)
- 50' SO CORD with male and female connectors (480V, 1 or 3 phase)
- 100' SO CORD with male and female connectors (480V, 1 or 3 phase)

Pig Tails

10' pigtails for hard wiring into generators and panel boxes.

- 10' SO CORD with connector (220V, 1 or 3 phase)
- 10' SO CORD with connector (480V, 1 or 3 phase)

220V Electrical Package

- 50' or 100' SO Cord w/ male and female connectors
- 10' Pigtail w/ connector
- 50 AMP 250 VOLT 3 PH Plug

480V Electrical Package

- 50' or 100' SO Cord w/ male and female connectors
- 10' Pigtail w/ connector
- 50 AMP 480 VOLT 3 PH Plug

220 - 480 Volt Three Phase Step Up Transformer

3 phase 220 volt step up to 3 phase 480 volt power. This transformer has a 10 ft. pigtail for 3 phase 208 volt input, and a 10 ft. 480 volt pigtail with a 50 AMP 3 phase connector.

480 - 220 Volt Three Phase Step Down Transformer

3 phase 480 volt steps down to 3 phase 220 volt power. This transformer has a 10 ft. pigtail input for a 3 phase 460 volt, and has a 10ft. 220V pigtail output with a 50 AMP 3 phase connector.

*220 volt single phase and 110 volt outlets can be added to these packages.

Voltage Cleaver

The Voltage Cleaver is used to tie two 110 volt legs together to produce 220 volt for machines that need higher HP, whereas 110 volt can only produce 1.5 HP.

- Suitable for machines up to 4 HP on this device
- Easy to Use
- Indicator Light will show when 220V power is ready

Leve-Sil™

Leve-Sil™ Hardener uses lithium or sodium chemistry to make the best concrete densifier available today. Concrete is exposed to harsh chemical, mechanical, and atmospheric elements that can cause the concrete to deteriorate. Leve-Sil penetrates into the substrate where it reacts with weak calcium hydroxide to form stronger and more stable tricalcium silicate hydrate.

Leve-Sil Sodium

Most common application to densify concrete, very economical.

Leve-Sil Lithium

Designed for harder concrete, can be applied at higher stages of grinding and polishing process and also can be used as a second coat in conjunction to Leve-Sil Sodium to increase penetration.

Leve-Gard™

Chemical Description: High performance lithium-silica and polymer penetrant for concrete and masonry. Solvent-free.

Uses: To enhance all concrete surfaces. Ideal for stamped, colored or stained concrete. Can be applied to all hardened concrete, silicates, siliconates or dry shakes. Restore shine, hardness, stain resistance and cleanability to new or existing concrete surfaces. Excellent results can be obtained on older, worn substrates as well. Surface must be clean and dry before applying Leve-Gard.

Maintenance: Keep surface clean with an automatic scrubber or wet-mop. Use a neutral cleaner, such as Leva-Clean. Dry buff with a high-speed hog's hair pad to enhance gloss.

LeveCryl™

LeveCryl is a concrete sealer and surface wear protector for all concrete surfaces, providing stain protection against water, oil and acid basedstaining agents.

Intended Use:

- Penetrating Sealer
- Polish Protectant
- Curing Membrane ASTMC 309
- Vapor Permeable





Colors

Dye-N-Seal™

Dye-N-SealTM is a translucent dye, designed to penetrate and color any cementitious surface. Dye-N-Seal dries quickly, reducing installation time and construction costs. In most cases, cleanup and sealing can be done in the same day. It is ideal for polished concrete and it can be used as a base-color for Blush-Tone Acid StainTM to achieve dramatic results.

Dye-N-Seal penetrates the surface of newly cured or existing concrete, creating a layer of translucent color that dries quickly and will not chip, crack, or peel. The colors produced in each section of concrete will be unique with captivating, multi-colored intensities that become a permanent part of the concrete. Colors can be combined to create an unlimited number of color variations. When applied properly, Dye-N-Seal creates intense color that has a look similar to the mottling effect of acid stain. Dye-N-Seal is packaged in powdered form to be mixed in proportion to acetone.

Dye-N-Seal is durable enough for commercial applications like restaurants, showrooms and retail spaces. It can be used to create vivid, new color for interior floors or concrete countertops. Dye-N-Seal can also be used to correct areas where acid stains have little or no reaction on the concrete surface. Dye-N-Seal is excellent in vertical applications, stencils, and logos because it dries so quickly. In addition; after 28 days, the concrete should be sealed with Leve-Gard Sealer for protection.

Note: Penetrating Additive is available as an option


SureLock Polished Concrete Color System

SureLock Color System puts rich color into the slab, penetrating, hardening and protecting the color from the damaging effects of excessive moisture on and in the concrete. UV stabilizers in every step help protect against fading. And SureLock keeps defending the surface every day against stains, oils, and even etching agents like vinegar. We've formulated the chemistries of dyeing and densifying so they work together, bonding the dye to the concrete and penetrating deeper to help stabilize and protect color from getting a faded desaturated look.

Penetrating Agent

With the addition of the PENETRATING AGENT, the acetone flash is delayed from 7-8 seconds, to 30+ seconds. This generally provides the necessary window of time for the dyes to penetrate. Additionally the penetrating agent, in many cases, will provide the opportunity to add color to floors which have already been densified and polished.

- Exentds the drying time of solvent based dyes
 Extremely easy to use add 1 to 4 oz. to a pre-mixed gallon of dye
- · Can be applied to most cementitious surfaces
- · Packaged in 30 oz. bottles that can be shipped by ground or air

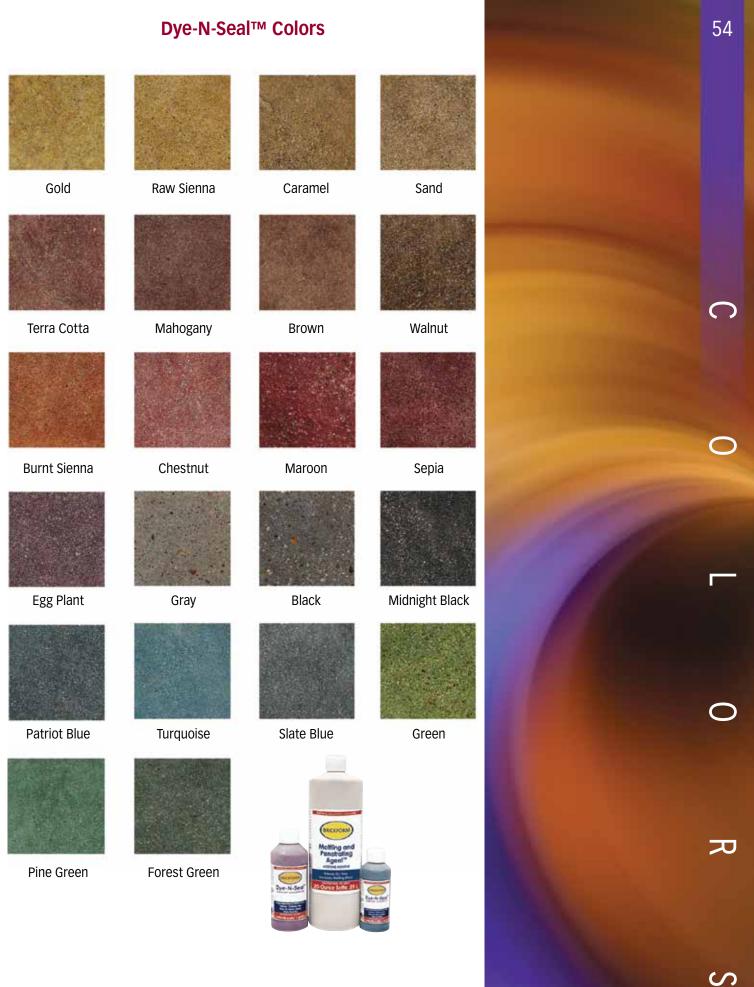

ORDER TODAY!! 866.538.3832







Grinders
Vacuums
Diamond Tools
Scarifiers
Blasters
Colors and Chemicals



Mailing Address

20245 N.E. Redmond-Fall City Road Redmond, WA 98053 U.S.A. toll free 866.538.3832 tel. 425.284.0950 fax. 425.284.0960

Retail Store

7102 180th Avenue NE, Suite A-107 Redmond, WA 98052 U.S.A. toll free 866.538.3832 tel. 425.284.0950 fax. 425.284.0960